


Manual Echo Testing Solutions for TDM

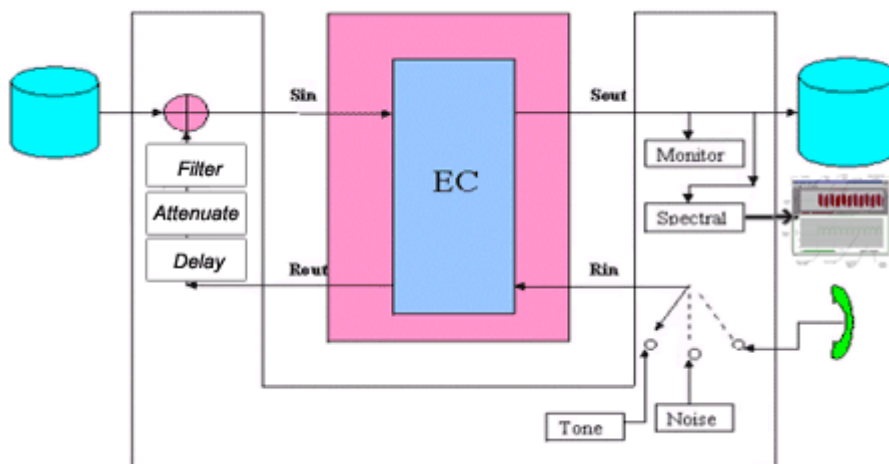

GL's T1/E1 Echo Canceller Test Suite includes optional licensed applications including Echo Path Delay/Loss Measurement, Echo Path Delay/Loss Simulation, and Echo Canceller Simulator with graphical echo path representation. The Measure Loop Delay/ERL application measures and displays loop delay and echo return loss (ERL) on one or more time slots. The Delay/Attenuate Timeslots application lets you delay, attenuate or amplify, and/or apply a filter to a received signal on any number of timeslots. The Delay/Attenuate Timeslots – Single Channel application supports short delay echo path modeling. This application also allows you to apply delay, attenuation or gain, and/or digital filtration to a received signal on a single timeslot. The Digital Echo Canceller (DEC) is a four-port device that supports bi-directional voice traffic between the two ends of a connection. The GLC View application is a waveform viewer application. It has been designed specifically as a companion component for GL's T1/E1 Echo Canceller Test Suite.

Echo Canceller Testing Features:

Measure Loop Delay /ERL module:

- Multiple timeslots and multiple measurement strategies supported.
- User-specified minimum and maximum delays expected in the echo path.
- Inputs from T1 / E1 timeslots, Gaussian noise generator, and A-Law/ μ -Law files.

Delay/Attenuate Timeslots module:

- Single and Multi-channel versions available.
- Single-channel module supports very short delays. Multiple instances may be run simultaneously.
- Noise and double-talk may be injected from noise generator or signal files.
- G.168 Echo Path models provided.

Digital Echo Canceller Simulator:

- Supports real-time and offline processing.
- Interfaces directly with A-Law or μ -Law encoded signals.
- 16, 32, 64 or 128 ms tail length; programmable tail offset.
- Comfort noise generator with adaptation to background noise level.
- Continuous reporting of echo path delay, ERL, and dispersion.

GLC View Waveform Viewer:

- Synchronized viewing of waveform and power graph.
- Programmable power window.
- Zoom-in and zoom-out capability.

For more details, please visit our web page <http://www.gl.com/echocan.html#tdm>.

Measure Loop Delay/ERL supports operations on multiple time slots

Generate Gaussian distributed white noise as input

Delay/ Attenuate/ Filter received signals on multiple timeslots

Mix-in speech and noise signals from a noise generator, a file, or VF input

Synchronize start process with incoming power burst

Short delay echo path modeling

Digital Echo Canceller Simulator provides echo path visibility

Continuous reporting of echo path delay, ERL, and dispersion

Interfaces directly with A-Law or μ -Law encoded signals

Supports Analog and VoIP Interfaces




GL Communications Inc.

818 West Diamond Avenue - Third Floor. Gaithersburg, MD 20878 • (V) 301-670-4784 (F) 301-670-9187

Web Page Address: <http://www.gl.com/> • E-Mail Address: gl-info@gl.com


Measure Loop Delay / ERL

The Measure Loop Delay/ERL module measures and displays loop delay and Echo Return Loss (ERL) on one or more time slots. Both intrusive and non-intrusive operations are supported. Non-intrusive operation requires two GL receive ports, one of which monitors the original signal while the other monitors the returned signal. Non-intrusive operation requires one GL send port where a test signal is injected, and one GL receive port, where the returned signal is monitored.

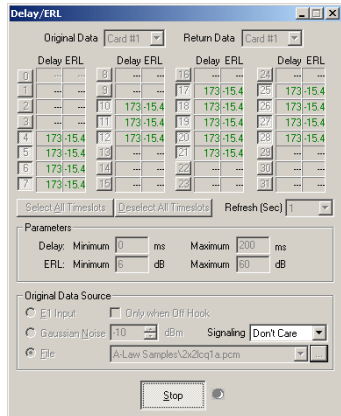

Delay Attenuate Timeslots (Optional Software - XX062)

This is an "input-process-output" application, where a block of data retrieved from the Rx data source and is processed by delaying, attenuating, and/or filtering. They are then retransmitted on the Tx Destination. This application allows applying delay, attenuation, and/or filtering to a received signal on any number of timeslots. Also allows mixing additional signals from a numerous sources, including signal files, VF input, T1 / E1 timeslots, and/or an internal Gaussian noise generator.

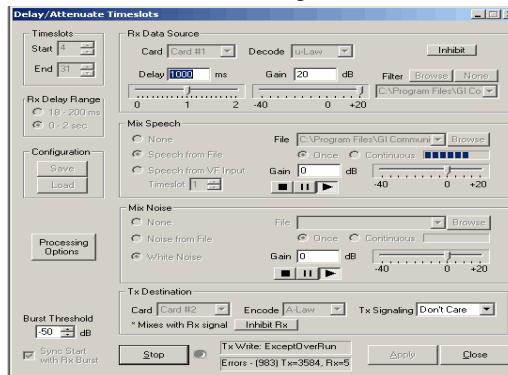

Buyers Guide

XX062 - Echo Path Delay/Loss Simulation Software w/GLCView

XX063 - Echo Path Delay/Loss Measurement Software

XX066 - Digital Echo Canceller

Related Software & Hardware

SA048 - Goldwave Software

XX065 - G.168 Echo Canceller Test Suite

XX067 - Automated Echo Canceller Testing for TDM-TDM

PKB080 - Automated Echo Canceller Testing for VoIP-TDM

XX068 - Semi-automated Scripted EC Testing


UTE001 - Portable USB based Dual T1 or E1 Laptop Analyzer

HTE001 - Universal HD T1 or E1 PCI Cards

*Specifications and features subject to change without notice.


Delay Attenuate Timeslots – Single Channel

This application facilitates Short-delay echo path modeling. It allows you to apply delay, attenuate (gain), and/or filtering to a received signal on a single timeslot. The signals from other sources can be mixed-in, including speech signals from VF input and Gaussian noise or tone signals generated internally by the module.

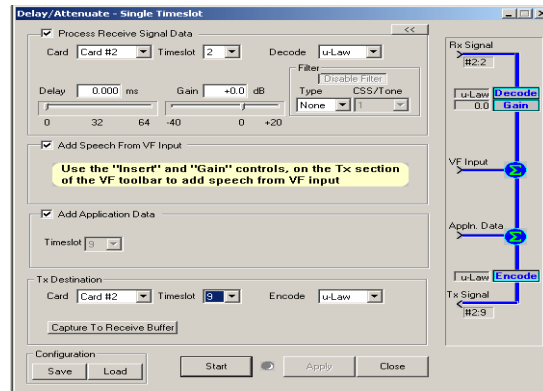

Digital Echo Canceller (Optional software - XX066)

A Digital Echo Canceller is a four-port device that supports bi-directional voice traffic between the far end and the near end of a connection. The function of the echo canceller is to detect and remove the echo. It does this by estimating the transfer function of the hybrid that produces the echo, which it accomplishes by comparing the echo to the original signal. This module interfaces directly with A-Law or μ -Law encoded signals. Both real-time and offline processing are supported.

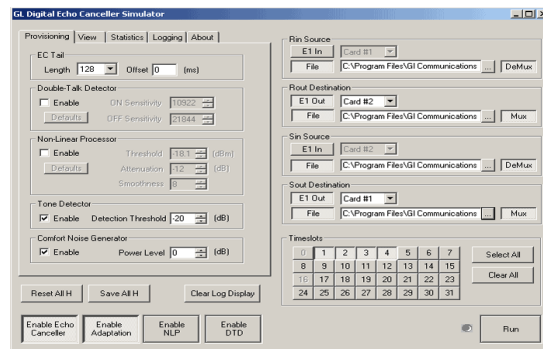

GLC View

GLC View is a waveform-viewer application. The program is used to view previously captured raw data files and their corresponding power.

